ITE-SHOP
By professionals for professionals

# TECHNICAL DATA SHEET

# Profile for removing

## The front panel

**REF : 2035-200**

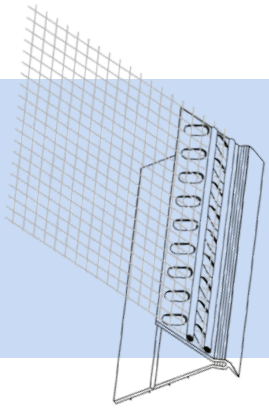

## SCOPE OF APPLICATION

The facade release profile is used as a starting profile without thermal bridges. The water drop profile prevents water from returning. Thanks to the grooves, the support in the insulation is better.

## IMPLEMENTATION OF THE PRODUCT

The profile is inserted between the basement insulation and the façade insulation and the integrated grid will be coated with the façade grid. The profile has a negative angle, which results in a clamping effect when inserted.

## TECHNICAL DATA

| | |
|---|---|
| Dimensions | 2 m |
| Material | Rigid PVC - weft certified according to ETA |
| Packaging | 25 pieces / carton |

**Géo Technic - Impasse Teynier 31100 TOULOUSE**
**www.ite-shop.com - contact@ite-shop.com**
SAS with a capital of 100 000 € - SIRET : 532 890 290 00051 - NAF : 4673A