


Banner

ISODEPORT

RIF: RPP 112

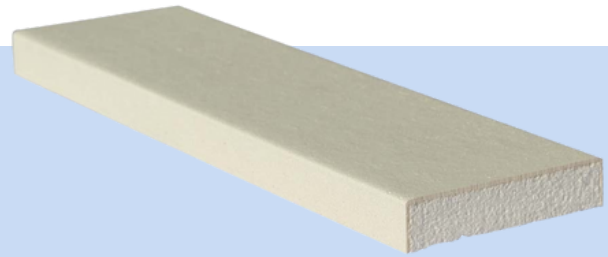

Banner and modénature in facade

DESCRIPTION

Facade fascia and modénature consisting of a core made of flame retardant expanded polystyrene and coated of a flame-retardant acrylic resin.

SCOPE OF APPLICATION

Product suitable for installation on new buildings or in innovation. Suitable for single-family homes, collective and tertiary housing buildings, Public Receiving Establishments (ERP) and industrial buildings.

This product is compatible with ETI systems.

ADVANTAGES

- Very light material
- High weather resistance
- Very easy to implement

PRECAUTION OF USE

Finishing paint shades with a solar absorption coefficient greater than 0.070 (luminance of light less than 35%) are to be avoided.

Fire classification	Euroclass E
Higher calorific value	PCS polystyrene : 40,845 MJ/kg PCS Resine negligible
Thermal conductivity	$\lambda_{dec} = 0,0358 \text{ W/(m.k)}$
Mechanical characteristics	Mechanical tests can be carried out at the customer's request.
Dimensions	Length : 2000 / 2500 mm Width : 35 mm Thickness (height) : 110 mm



Géo Technic - Impasse Teynier 31100 TOULOUSE

www.ite-shop.com - contact@ite-shop.com

SAS with a capital of 100 000 € - SIRET : 532 890 290 00051 - NAF : 4673A